


型号(TYPE): WFI

转造级库存螺杆系列 (Stock Rolld Ball Screw Series)

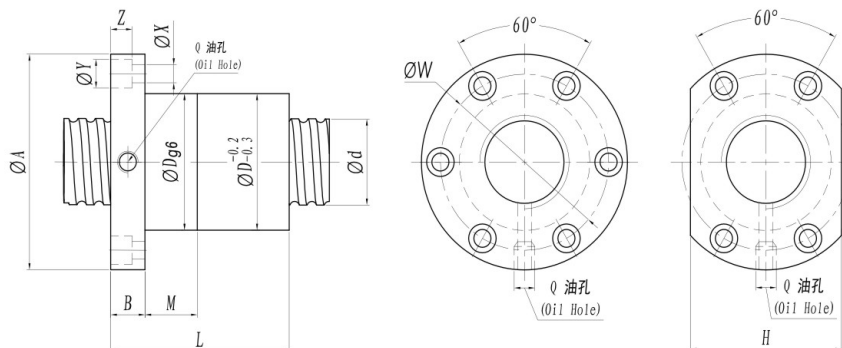

单位 (Unit) : mm

I: 导程 Lead Da: 珠径 Ball Dia. n: 珠圈数 Number of Circuits

Ca: 动额定负荷 Basic Dunamic Rating Load (Kgf)

Coa: 静额定负荷 Basic Static Rating Load (Kgf)

型号	滚珠丝杆, 螺母基准数据 Dimensions																
Model No.	d	l	Da	D	A	B	M	L	W	H	X	Y	Z	Q	n	Ca	Coa
WFI0802-3	7.5	2	1.588	16	32	8	10	25	23	22	3.5	6	3.5	M4X0.7	3	210	265
WFI0802.5-3		2.5	1.588	16	32	8	10	25	23	22	3.5	6	3.5	M4X0.7	3	220	280
WFI1202-3	11.5	2	1.588	20	44	8	10	30	32	30	4.5	8	4.5	M4X0.7	3	330	380
WFI1204-3	11.4	4	2	22	44	8	10	35	32	30	4.5	8	4.5	M4X0.7	3	350	400
WFI1205-3		5	2	22	44	8	10	35	32	30	4.5	8	4.5	M4X0.7	3	380	580
★ WFI1210-2		10	2	22	44	8	10	30	32	30	4.5	8	4.5	M4X0.7	2	250	360
WFI1604-3	15.3	4	2.381	28	52	10	12	38	38	34	4.5	8	4.5	M6X1	3	435	920
★ WFI1605-3	15	5	3	28	52	10	12	42	38	34	4.5	8	4.5	M6X1	3	765	1320
WFI1610-3		10	3	30	52	10	12	45	38	34	5.5	9	5.5	M6X1	3	960	1230
★ WFI1616-2		16	3	30	52	10	12	32	38	34	5.5	9	5.5	M6X1	2	630	1010
WFI2004-3	19.5	4	2.381	33	58	10	12	38	44	40	5.5	9	5.5	M6X1	3	600	1010
WFI2005-3	19	5	3	35	60	10	12	42	46	42	5.5	9	5.5	M6X1	3	1430	2150
WFI2010-3	19.4	10	3.175	36	60	10	12	54	46	42	5.5	9	5.5	M6X1	3	1050	1770
WFI2020-2	19.4	20	3.5	36	60	10	12	40	46	42	5.5	9	5.5	M6X1	2	910	1210
WFI2504-3	24.3	4	2.381	38	66	12	15	38	51	46	6.5	11	6.5	M6X1	3	610	1040
★ WFI2505-3	24	5	3	40	68	12	15	50	53	48	6.5	11	6.5	M6X1	3	1590	2720
WFI2510-3	24.5	10	3.969	42	70	12	15	76	55	50	6.5	11	6.5	M6X1	3	1120	2420
WFI2525-2	24.1	25	3.5	42	70	12	15	47	55	50	6.5	11	6.5	M6X1	2	1010	1510
★ WFI3205-4	31.6	5	3.5	48	85	15	20	55	65	55	9	14	8.5	M8X1	4	2160	4000
WFI3210-3	31.6	10	5.556	52	87	15	20	78	67	56	9	14	8.5	M8X1	3	2550	4690
WFI3220-4	31	20	3.969	52	87	15	20	90	67	56	9	14	8.5	M8X1	4	2295	3706
WFI3232-2	31	32	3.969	52	87	15	20	58	67	56	9	14	8.5	M8X1	2	1340	2200
WFI4005-5	39.6	5	3.5	55	90	15	20	55	70	59	9	14	8.5	M8X1	5	2910	6410
★ WFI4010-3	39.5	10	7.144	64	106	18	25	82	81	72	10.5	18	11	M8X1	3	3910	9520
WFI4020-3	38	20	6	64	106	18	25	90	81	72	10.5	18	11	M8X1	3	3790	6280
WFI4040-2	40	40	6.35	68	110	18	25	70	85	75	10.5	18	11	M8X1	2	2550	4030
WFI5005-5	49	5	3.5	68	110	18	25	52	85	75	10.5	18	11	M8X1	5	3150	8030
WFI5010-4	49.3	10	7.144	75	117	18	25	91	92	80	10.5	18	11	M8X1	4	4340	9070
WFI5020-3	48.2	20	6.35	77	119	18	25	91	94	82	10.5	18	11	M8X1	3	4780	8750
WFI5040-2	48	40	6.5	77	119	18	25	71	94	82	10.5	18	11	M8X1	2	3210	5580
WFI6310-4	62.6	10	7.144	86	138	22	30	104	107	97	13	20	13	M8X1	4	7400	17860
WFI6320-3	62.6	20	7.144	95	146	22	30	96	116	100	13	20	13	M8X1	3	5320	11210
WFI8010-4	80	10	7.144	105	155	22	30	111	125	110	13	20	13	M8X1	4	8440	22710
WFI8020-4	80	20	12.7	125	165	22	30	160	145	130	13	20	13	M8X1	4	15226	35749

备注: 有标注★记号者可制作左旋螺纹

Note: with sign ★ can produce left helix