


型号 (TYPE) : WFU

转造级库存螺杆系列 (Stock Rolldde Ball Screw Series)

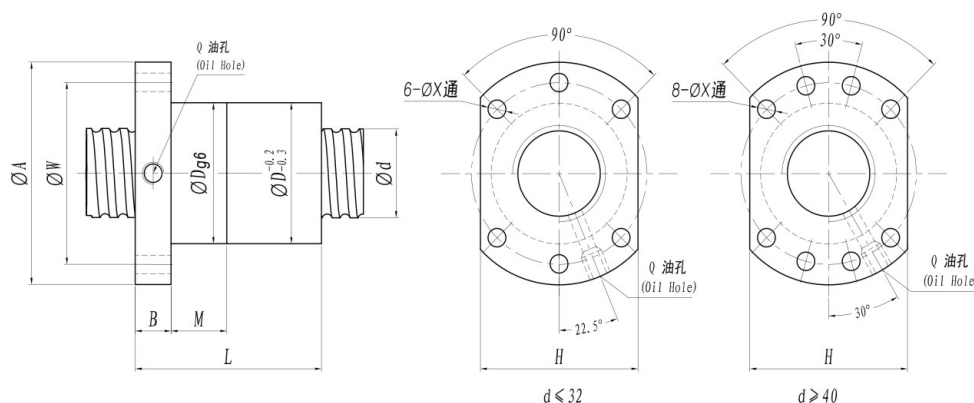

单位 (Unit) : mm

I: 导程 Lead Da: 珠径 Ball Dia. n: 珠圈数 Number of Circuits

Ca: 动额定负荷 Basic Dunamic Rating Load (Kgf)

Coa: 静额定负荷 Basic Static Rating Load (Kgf)


型号 Model No.	滚珠丝杆, 螺母基准数据 Dimensions														
	d	I	Da	D	A	B	M	L	W	X	H	Q	n	Ca	Coa
WFU0802-3	7.5	2	1.588	16	31	8	10	25	23	3.4	25	M4X0.7	3	210	265
WFU0802.5-3		2.5	1.588	16	31	8	10	25	23	3.4	35	M4X0.7	3	220	280
WFU1202-3	11.5	2	1.588	20	42	8	10	30	32	4.5	35	M4X0.7	3	330	380
WFU1204-3	11.4	4	2	22	42	8	10	35	32	4.5	35	M4X0.7	3	350	400
WFU1205-3		5	2	22	42	8	10	35	32	4.5	35	M4X0.7	3	380	580
★ WFU1210-2		10	2	22	42	8	10	30	32	4.5	35	M4X0.7	2	250	360
WFU1604-3	15.3	4	2.381	28	50	10	12	38	38	5.5	39	M6X1	3	435	920
★ WFU1605-3	15	5	3	28	50	10	12	42	38	5.5	39	M6X1	3	765	1320
WFU1610-3		10	3	30	50	10	12	45	38	5.5	39	M6X1	3	960	1230
★ WFU1616-2		16	3	30	50	10	12	32	38	5.5	39	M6X1	2	630	1010
WFU2004-3	19.5	4	2.381	33	55	10	12	38	44	5.5	47	M6X1	3	600	1010
WFU2005-3	19	5	3	35	57	10	12	42	46	5.5	50	M6X1	3	1430	2150
WFU2010-3	19.35	10	3.175	36	57	10	12	54	46	5.5	50	M6X1	3	1050	1770
WFU2020-2	19.4	20	3.5	36	57	10	12	40	46	5.5	50	M6X1	2	910	1210
WFU2504-3	24.3	4	2.381	38	64	12	15	38	51	6.5	52	M6X1	3	610	1040
★ WFU2505-3	24	5	3	40	66	12	15	50	53	6.5	55	M6X1	3	1590	2720
WFU2510-3	24.5	10	3.969	42	68	12	15	76	55	6.5	57	M6X1	3	1120	2420
WFU2525-2	24.1	25	3.5	42	68	12	15	47	55	6.5	57	M6X1	2	1010	1510
★ WFU3205-4	31.6	5	3.5	48	80	15	20	55	65	6.5	66	M8X1	4	2160	4000
WFU3210-3	31.6	10	5.556	52	83	15	20	78	67	6.5	69	M8X1	3	2550	4690
WFU3220-4	31	20	3.969	52	83	15	20	90	67	6.5	69	M8X1	4	2295	3706
WFU3232-2	31	32	3.969	52	83	15	20	58	67	6.5	69	M8X1	2	1340	2200
WFU4005-5	39.58	5	3.5	55	88	15	20	55	70	9	72	M8X1	5	2910	6410
★ WFU4010-3	39.51	10	7.144	64	100	18	25	82	81	9	83	M8X1	3	3910	9520
WFU4020-3	38	20	6	64	100	18	25	90	81	9	83	M8X1	3	3790	6280
WFU4040-2	40	40	6.35	68	105	18	25	70	85	9	87	M8X1	2	2550	4030

备注: 有标注★记号者可制作左旋螺纹

Note: with sign ★ can produce left helix

型号(TYPE): WFU

转造级库存螺杆系列 (Stock Rolld Ball Screw Series)

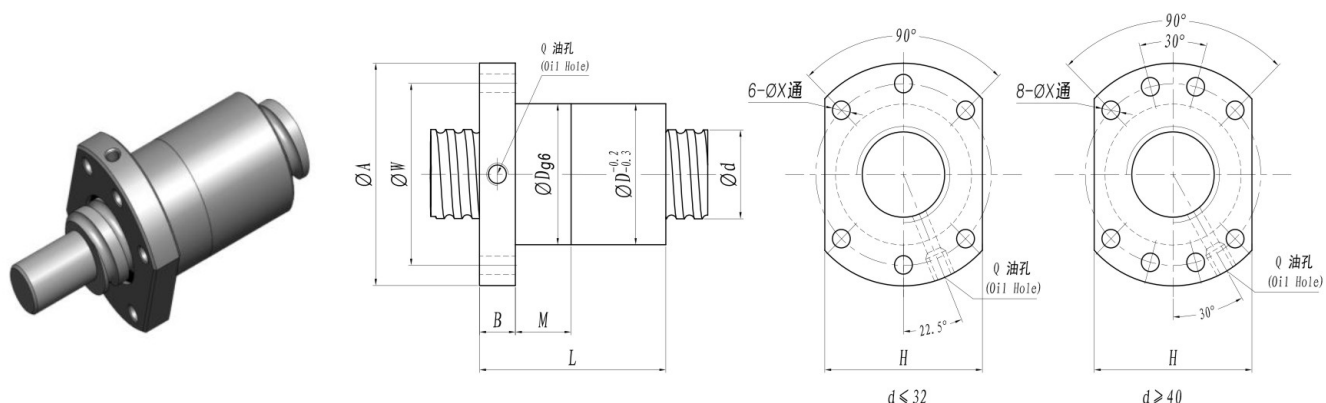

单位 (Unit) : mm

I: 导程 Lead Da: 珠径 Ball Dia. n: 珠圈数 Number of Circuits

Ca: 动额定负荷 Basic Dunamic Rating Load (Kgf)

Coa: 静额定负荷 Basic Static Rating Load (Kgf)

型号 Model No.	滚珠丝杆, 螺母基准数据 Dimensions														
	d	l	Da	D	A	B	M	L	W	X	H	Q	n	Ca	Coa
WFU5005-5	49	5	3.5	68	107	18	25	52	85	11	92	M8X1	5	3150	8030
WFU5010-4	49.31	10	7.144	75	115	18	25	91	92	11	96	M8X1	4	4340	9070
WFU5020-3	48.15	20	6.35	77	117	18	25	91	94	11	98	M8X1	3	4780	8750
WFU5040-2	48	40	6.5	77	117	18	25	71	94	11	98	M8X1	2	3210	5580
WFU6310-4	62.55	10	7.144	86	132	22	30	104	107	13	110	M8X1	4	7400	17860
WFU6320-3	62.55	20	7.144	95	142	22	30	96	116	13	118	M8X1	3	5320	11210
WFU8010-4	80	10	7.144	105	152	22	30	111	125	13	125	M8X1	4	8440	22710
WFU8020-4	80	20	12.7	125	170	22	30	160	145	13	145	M8X1	4	15226	35749

备注: 有标注★记号者可制作左旋螺纹 Note: with sign ★ can produce left helix