



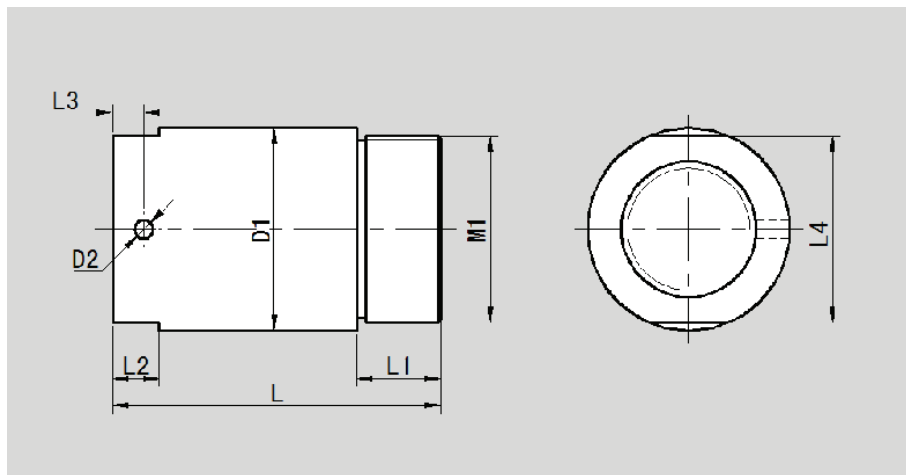

Unit :mm

Size doxI-i	L	L1	L2	L3	L4	Part number
12X4-3	34	10	6	5	23	LL1204G-0
16X4-3	58	16	6	5	30	LL1604G-0
16X5-3	58	16	6	5	30	LL1605G-0
20X4-4	58	16	10	5	35	LL2004G-0
20X5-4	58	16	10	5	35	LL2005G-0
25X4-4	58	16	10	5	39	LL2504G-0
25X5-4	64	17	10	6	39	LL2505G-0
32X5-4	66	19	12	6	48	LL3205G-0
32X10-4	85	19	12	6	48	LL3210G-0
40X5-5	68	19	12	6	54	LL4005G-0
40X10-5	106	27	12	6	61	LL4010G-0
50X5-5	100	29	12	6	73	LL5005G-0
50X10-6	118	29	12	6	73	LL5010G-0
63X10-6	118	29	15	8	87	LL6310G-0
80X10-6	126	34	15	8	115	LL8010G-0

Cylindrical single nut type Z

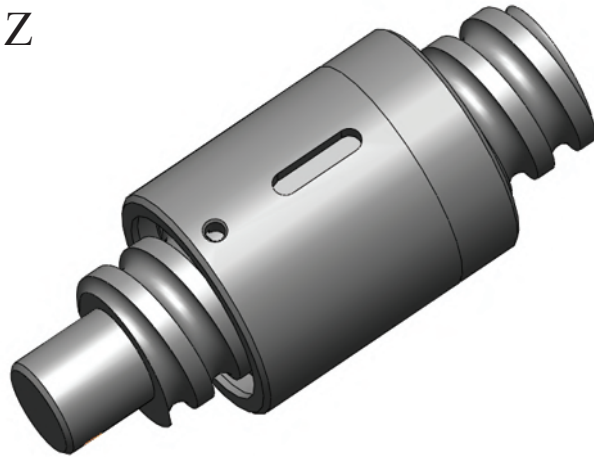

do: Nominal diameter

l: Lead

i: Number of track turns

Size doxl-i	dyn. load Ca (KN)	stat. load Coa (KN)	D1 g6	D2	T	B
8X2.5-3	2.2	2.8	16	2	1.8	3
12X4-3	3.5	4	22	3	1.8	3
12X5-3	3.8	5.8	22	3	1.8	3
12X10-2	2.5	3.6	22	3	1.8	3
16X4-3	4.35	9.2	28	3	3	5
16X5-3	7.65	13.2	28	3	3	5
16X10-3	9.6	12.3	30	3	3	5
16X16-2	6.3	10.1	30	3	3	5
20X04-3	6	10.1	33	3	3	5
20X5-3	14.3	21.5	36	3	3	5
20X10-3	10.5	17.7	36	3	3	5
20X20-2	9.1	12.1	38	3	3	5
25X4-3	6.1	10.4	38	3	3	5
25X5-3	15.9	27.2	40	3	3	5
25X10-4	11.2	24.2	42	3	3	5
25X25-2	10.1	15.1	42	3	3	5
32X5-4	21.6	40	48	4	3	5
32X10-3	25.5	46.9	50	4	3	5
32X20-2	13.5	21.8	55	4	3	5
32X32-2	13.4	22	50	4	3	5
40X5-5	29.1	64.1	56	4	3.5	6
40X10-3	33.8	69.3	63	4	3.5	6
40X20-3	37.9	62.8	68	4	3.5	6
40X40-2	25.5	40.3	68	4	3.5	6
50X5-5	31.5	80.3	68	4	3.5	6
50X10-4	43.4	90.7	75	4	3.5	6
50X12-4	53.1	110.9	75	4	3.5	6
50X20-3	47.8	87.5	78	4	3.5	6
50X40-2	32.1	55.8	75	4	3.5	6
63X10-4	74	178.6	90	4	3.5	6
63X20-3	53.2	112.1	93	4	3.5	6
80X10-4	84.4	227.1	105	4	3.5	6