


丝杆轴端形状Screw end forms


类型01-02 Form 01-02

端
部
支
撑


Supported end

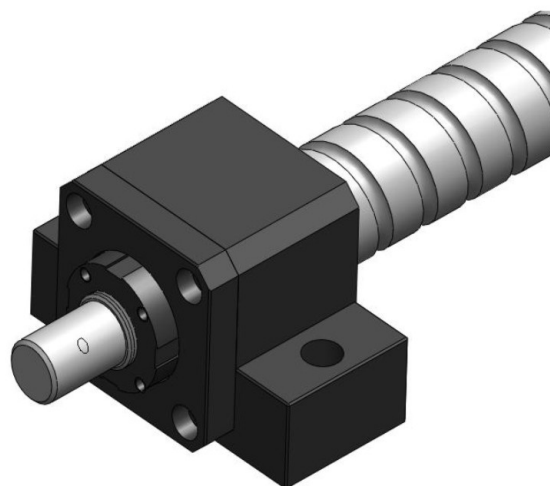

类型 Form	滚珠丝杠规格		L1	D1		L2	D2 h7	S	M
	Ball screw size								
	d ₀	P							
01	8	2.5	28	6	-0.005 -0.012	8	4	8	M6X0.75
	12	4/5/10	32	8	-0.005 -0.012	9	6	10	M8X1
	12	4/5/10	36	10	-0.005 -0.012	15	8	11	M10X1
	16	4/5/10/16	36	12	-0.005 -0.012	15	10	11	M12X1
	20	4/5/10/20	47	15	-0.005 -0.014	20	12	13	M15X1
	20	4/5/10/20	58	17	-0.005 -0.014	23	15	15	M17X1
	25	4/5/10/25	62	20	-0.005 -0.014	25	17	17	M20X1
	32	5/10/20/32	76	25	-0.005 -0.014	30	20	20	M25X1.5
	40	5/10/20/40	72	30	-0.005 -0.015	38	25	25	M30X1.5
	50	5/10/12/20/40	93	40	-0.005 -0.015	50	35	35	M40X1.5
02	16	4/5/10/16	36	12	-0.005 -0.012	15	10	11	M12X1
	20	4/5/10/20	47	15	-0.005 -0.014	20	12	13	M15X1
	20	4/5/10/20	58	17	-0.005 -0.014	23	15	15	M17X1
	25	4/5/10/25	62	20	-0.005 -0.014	25	17	17	M20X1
	32	5/10/20/32	76	25	-0.005 -0.014	30	20	20	M25X1.5
	40	5/10/20/40	72	30	-0.005 -0.015	38	25	25	M30X1.5
	50	5/10/12/20/40	93	40	-0.005 -0.015	50	35	35	M40X1.5

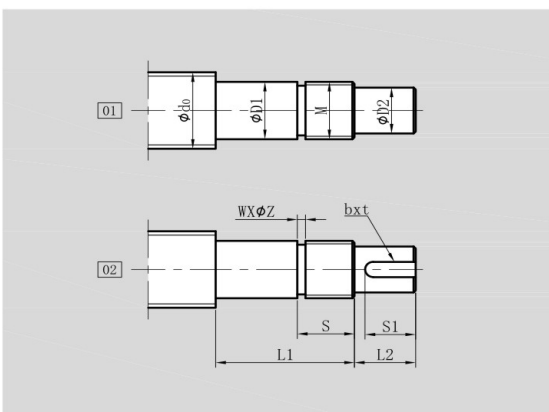

支撑座剖视图Application

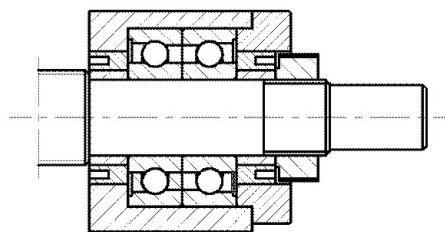

单位 Unit: mm

滚珠丝杠规格		键槽			螺纹退刀槽		支撑座型号			
Ball screw size		Keyway			Thread undercut ring		End support block			
d ₀	P	S1	b P9	t +0.1	w	Φ z	FK型	EK型	AK型	BK型
8	2.5	—	—	—	1.5	5	FK06	EK06	—	—
12	4/5/10	—	—	—	2	7	FK08	EK08	—	—
12	4/5/10	—	—	—	2	8	FK10	EK10	AK10	—
16	4/5/10/16	—	—	—	2	10	FK12	EK12	AK12	—
20	4/5/10/20	—	—	—	2	13	FK15	EK15	AK15	—
20	4/5/10/20	—	—	—	2	15	FK17	—	—	—
25	4/5/10/25	—	—	—	2	18	FK20	EK20	AK20	—
32	5/10/20/32	—	—	—	3	23	FK25	—	—	—
40	5/10/20/40	—	—	—	3	28	FK30	—	—	BK30
50	5/10/12/20/40	—	—	—	3	38	—	—	—	BK40
16	4/5/10/16	12	3	1.8	2	10	FK12	EK12	AK12	—
20	4/5/10/20	17	4	2.5	2	13	FK15	EK15	AK15	—
20	4/5/10/20	20	5	3	2	15	FK17	—	—	—
25	4/5/10/25	21	5	3	2	18	FK20	EK20	AK20	—
32	5/10/20/32	25	5	3	3	23	FK25	—	—	—
40	5/10/20/40	32	8	4	3	28	FK30	—	—	BK30
50	5/10/12/20/40	45	8	4	3	38	—	—	—	BK40